



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: **0 566 219 A2**

(19)

EUROPEAN PATENT APPLICATION

(21) Application number: **93201962.3**

(51) Int. Cl.⁵: **H04N 11/04, H04N 7/13**

(22) Date of filing: **22.04.92**

This application was filed on 06 - 07 - 1993 as a divisional application to the application mentioned under INID code 60.

(30) Priority: **23.04.91 JP 92288/91**

(43) Date of publication of application:
20.10.93 Bulletin 93/42

(50) Publication number of the earlier application in accordance with Art.76 EPC: **0 510 921**

(84) Designated Contracting States:
DE ES FR GB IT NL

(71) Applicant: **CANON KABUSHIKI KAISHA**
30-2, 3-chome, Shimomaruko,
Ohta-ku
Tokyo(JP)


(72) Inventor: **Fujii, Akio, c/o Canon Kabushiki**
Kaisha
30-2, 3-chome,
Shimomaruko
Ohta-ku, Tokyo(JP)

(74) Representative: **Beresford, Keith Denis Lewis**
et al
BERESFORD & Co.
2-5 Warwick Court
High Holborn
London WC1R 5DJ (GB)

(54) **Image processing apparatus.**

(57) The invention is intended to improve image quality in a process of image coding. In an apparatus for quantizing conversion data resulted from converting image information into frequency regions and then coding the quantized data, a coefficient to be multiplied by a chrominance quantizing matrix is set depending on a coefficient to be multiplied by a luminance quantizing matrix for an improvement in color reproducibility.

FIG.1

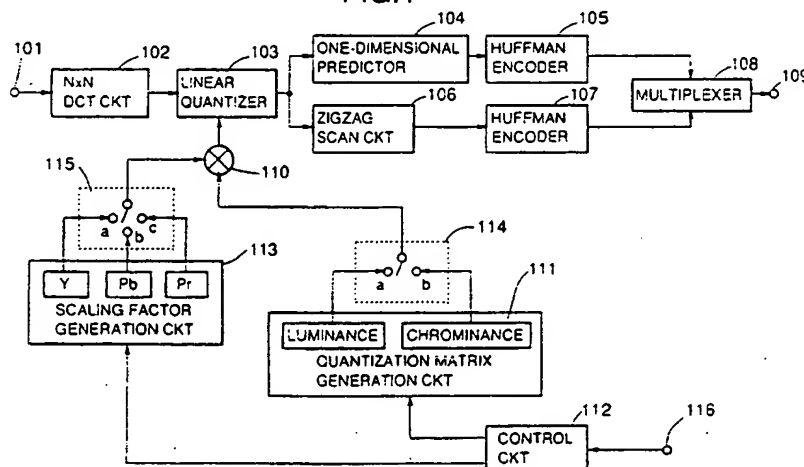

EP 0 566 219 A2

The present invention relates to an image processing method and apparatus, and more particularly to an image processing method and apparatus for quantizing frequency conversion data and coding the quantized conversion data.

A number of color image compressing techniques have been proposed in the past. As a typical one of color still image coding techniques, there is proposed an adaptive discrete cosine transform coding method (hereinafter referred to as an ADCT method).

Fig. 3 is a conceptual view showing arrangement of an image coding apparatus using the ADCT method. It is assumed that an input image is given by data converted into 8 bits, i.e., 256 gradations, for each color in a not-shown analog-to-digital converter (hereinafter referred to as an A/D converter) and the number of colors is three, i.e., luminance Y, color P_B and color P_R , in this case.

The digital data of the luminance signal Y inputted through an input terminal 101 in Fig. 3 is subjected to two-dimensional discrete cosine transform (hereinafter abbreviated as DCT) in an $N \times N$ DCT circuit 102 in units of subblocks each comprising $N \times N$ pixels. Thereafter, the conversion coefficients are linearly quantized in a linear quantizer 113 with a quantizing step size being different for each of the conversion coefficients. The quantizing step sizes for respective conversion coefficients are given by values resulted from multiplying 2^S by quantization matrix elements of $N \times N$ in consideration of the fact that visual sensitivity for quantizing noise is different for each of the conversion coefficients. Here, S is 0 or a positive or negative integer and called a scaling factor. The image quality or the data to be generated is controlled depending on the value of S.

One example of the quantization matrix elements is shown in Fig. 5 in the case of 8×8 . A quantization matrix generation circuit 111 is controlled by a control circuit 302 and generates a quantization matrix for the luminance signal Y. A switch 114 is changed over to select the side a for supplying the quantization matrix for the luminance signal Y to a multiplier 110. Using the scaling factor S supplied from a scaling factor generation circuit 301, the multiplier 110 multiplies 2^S by each quantized element of the quantization matrix. The multiplied results are supplied to the linear quantizer 103 where the conversion coefficients are linearly quantized by using the supplied results.

After the quantization, direct current conversion coefficients (hereinafter referred to as DC components) are supplied to a one-dimensional predictor 104 to calculate prediction values using several subblocks adjacent to each other, and prediction errors are subjected to Huffman coding in a Huffman encoder 105. More specifically, after dividing quantized outputs of the prediction errors into groups, the ID numbers of the groups to which the respective prediction errors belong are first subjected to Huffman coding, and which values in each group correspond to the respective prediction errors are then represented by using equi-length codes.

The conversion coefficients other than the above DC components, i.e., the alternating current conversion coefficients (hereinafter referred to as AC components), are supplied to a zigzag scan circuit 106 in which the AC components are scanned in a zigzag manner with two-dimensional frequencies from low-frequency component to high-frequency component as shown in Fig. 4, followed by Huffman coding in a Huffman encoder 107. More specifically, those conversion coefficients for which the quantized outputs are not 0 (hereinafter referred to as significant coefficients) are divided into groups depending on their values.

The ID numbers of the divided groups and the numbers of those conversion coefficients which are present between every two significant coefficients and for which the quantized outputs are 0 (hereinafter referred to as insignificant coefficients) are subjected in pair to Huffman coding. Subsequently, which values in each group correspond to the significant coefficients are represented by using equi-length codes.

Respective code strings of the DC components and the AC components are multiplexed in a multiplexer 108 and outputted from an output terminal 109.

Next, when the digital data of the chrominance signals P_B , P_R are inputted through the input terminal 101, the control circuit 302 controls the quantization matrix generation circuit 111 to generate quantization matrices for the chrominance signals P_B , P_R . The switch 114 is changed over to select the side b for supplying the quantization matrices for the chrominance signals to the multiplier 110. Subsequently, the chrominance signals processed in a like manner to the luminance signal Y as mentioned above for Huffman coding.

When the compression rate requires to be increased (for a higher degree of compression) from limitations in a transmission path or other reasons, control information is entered from an input terminal 303 so that the control circuit 302 controls a scaling factor generation circuit 301 to increase the scaling factor S. Conversely, in order to obtain a high-quality image, the scaling factor S is made smaller.

However, because the scaling factor S of the same value is used when coding the luminance signal Y and the chrominance signals P_B , P_R in the above prior art, there has accompanied a shortcoming that image quality in color areas (particularly in a red area to which human eyes are more sensitive) deteriorates to a

remarkable extent, when the value of the scaling factor S is increased to obtain a high degree of compression.

The present invention is concerned with providing an image processing apparatus which can realize satisfactory reproducibility of colors.

5 Accordingly, in one aspect the present invention comprises input means for inputting image data representing a color image, first encoding means for encoding the image data by using a first encoding parameter and second encoding means for encoding the same image data by using a second encoding parameter different from the first encoding parameter, and wherein said first and second encoding means encode the image data in parallel.

10 From a second aspect the present invention comprises an input step of inputting image data representing a color image, a first encoding step of encoding the image data by using a first encoding parameter and a second encoding step of encoding the same image data by using a second encoding parameter different from the first encoding parameter, wherein said first and second encoding steps are performed in parallel.

15 In order that the present invention may be more readily understood, embodiments thereof will now be described by way of example and with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

- 20 Fig. 1 is a block diagram showing a first embodiment of the present invention;
 Fig. 2 is a block diagram showing a second embodiment of the present invention;
 Fig. 3 is a block diagram showing the prior art;
 Fig. 4 is a diagram representing a zigzag scan;
 Fig. 5 is a diagram showing one example of quantization matrix elements; and
 25 Fig. 6 is a block diagram showing an application example of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In the following embodiments of the present invention, a coefficient factor to be multiplied by
 30 quantization matrix elements for a chrominance signal is controlled depending on a scaling factor value S_0 of a luminance signal Y , thereby reducing an extent of deterioration in image quality even when the scaling factor value is increased for a higher compression rate.

Fig. 1 is a block diagram showing a first embodiment of the present invention. In the drawing, denoted
 by reference numeral 101 is an input terminal for digital image data, 102 is a DCT circuit per $N \times N$ pixels,
 35 103 is a linear quantizer for linearly quantizing conversion coefficients, 104 is a one-dimensional predictor for DC components, 105 is a Huffman encoder, 106 is a zigzag scan circuit for scanning AC components in a zigzag pattern, 107 is a Huffman encoder, 108 is a multiplexer for multiplexing codes of the DC and AC components, and 109 is an output terminal. 110 is a multiplier for multiplying quantization matrix elements for luminance or chrominance by a scaling factor, 111 is a quantization matrix generation circuit for
 40 generating quantization matrices for luminance and chrominance, 112 is a control circuit for controlling the quantization matrix generation circuit and a scaling factor generation circuit, 113 is a scaling factor generation circuit for generating scaling factors or coefficients to be multiplied for a luminance signal Y and chrominance signals P_B , P_R , 114, 115 are select switches, and 116 is an input terminal through which control information (such as an amount of coded data) is entered to the control circuit.

45 Note that components having the same functions as those in Fig. 3 are denoted by the same reference numerals. The following description will be made about only different parts between the prior art and this embodiment.

The scaling factor generation circuit 113 is controlled by the control circuit 112 to generate the scaling factor value S_0 to be multiplied by the quantization matrix elements for the luminance signal Y and, at this
 50 time, the switch 115 is changed over to select the contact a. When conversion coefficients of the chrominance signal P_B are linearly quantized by the linear quantizer 103 after coding the luminance signal Y , the scaling factor generation circuit 113 is controlled by the control circuit 112 to generate a scaling factor S_B for P_B , and the switch 115 is changed over to select the contact b. In this case, S_B is generated as a function of S_0 , for example, as expressed below:

$$55 \quad S_B = f_B(S_0)$$

When conversion coefficients of the chrominance signal P_R are linearly quantized by the linear

quantizer 103, the scaling factor generation circuit 113 is controlled by the control circuit 112 to generate a scaling factor S_R for P_R , and the switch 115 is changed over to select the contact c. In this case, S_R is generated as a function of S_0 , for example, as expressed below:

$$S_R = f_R(S_0)$$

Example of function forms of S_B , S_R usable in this embodiment are enumerated below:

$$i) S_B = f_B(S_0) = S_0 + XB,$$

$$S_R = f_R(S_0) = S_0 - XR$$

10

where XB , XR are positive constants

ii)

15

$$S_B = f_B(S_0) = \begin{cases} S_0 \times KB_1 & (S_0 \geq 0) \\ S_0 \times KB_2 & (S_0 < 0) \end{cases}$$

20

$$S_R = f_R(S_0) = \begin{cases} S_0 \times KR_1 & (S_0 \geq 0) \\ S_0 \times KR_2 & (S_0 < 0) \end{cases}$$

where KB_1 , KB_2 , KR_1 , KR_2 are constants

25

$$iii) S_B = f_B(S_0) = S_0 \times K_B(S_0),$$

$$S_R = f_R(S_0) = S_0 \times K_R(S_0)$$

where $K_B(S_0)$, $K_R(S_0)$ are functions of S_0

iv)

30

$$S_B = f_B(S_0) = S_0$$

$$S_R = f_R(S_0) = \begin{cases} S_0 & (S_0 < A) \\ C & (S_0 \geq A) \end{cases}$$

35

where C , A are constants

Optimum ones of the above functions and constants are selected depending on the compression rate required and the nature of an input image so that deterioration of image quality is minimized. This selection can be achieved by, for example, repeating the coding process several times with different quantization characteristics or performing the coding processes with different quantization characteristics in parallel as explained later.

As an alternative method of controlling respective quantization steps for the chrominance signals P_B , P_R , the coefficients to be multiplied by the quantization matrix elements for chrominance signals may be themselves controlled rather than generating the scaling factors. In this case, the scaling factor generation circuit 113 generates coefficients M_B , M_R to be multiplied for the chrominance signals P_B , P_R in place of the scaling factors. M_B , M_R are functions of S_0 as expressed below:

$$M_B = g_B(S_0), M_R = g_R(S_0)$$

Example of function forms of M_B , M_R usable in this case are enumerated below:

v)

55

$$M_B = g_B(S_0) = 2^{S_0} + TB,$$

$$M_R = g_R(S_0) = 2^{S_0} - TR$$

where TB, TR are positive constants
vi)

$$M_B = g_B(S_0) = CB \times 2^{S_0},$$

$$M_R = g_R(S_0) = CR \times 2^{S_0}$$

where CB, CR are constants
vii)

$$M_B = g_B(S_0) = 2^{S_0} \times C_B(S_0),$$

$$M_R = g_R(S_0) = 2^{S_0} \times C_R(S_0),$$

where $C_B(S_0)$, $C_R(S_0)$ are functions of S_0
viii)

$$M_B = g_B(S_0) = 2^{S_0}$$

$$M_R = g_R(S_0) = \begin{cases} 2^{S_0} & (S_0 < B) \\ CO & (S_0 \geq B) \end{cases}$$

Optimum ones of the above functions and constants are selected depending on the compression rate required and the nature of an input image so that deterioration of image quality is minimized.

The compression rate can be changed by entering control information to the control circuit 112 through the input terminal 116 and changing the scaling factor value S_0 . The mode for the method of deciding the quantizing steps for the chrominance signals P_B , P_R can also be changed by entering mode information to the control circuit 112 through the input terminal 116.

As mentioned above, since the scaling factor values of the luminance signal Y and the chrominance signals P_B , P_R are set by controlling the scaling factor values of the chrominance signals P_B , P_R depending on the scaling factor value S_0 of the luminance signal Y (such that in need of increasing the compression rate, a smaller scaling factor value is set for P_R which has higher visual sensitivity and a larger scaling factor value is set for P_B), an image with less deterioration in image quality can be obtained even when the compression rate is increased. Further, by controlling the coefficients to be multiplied by the quantization matrix elements for the chrominance signals using function such as f_B , f_R , g_B , g_R , the coding can be performed more efficiently than the case of setting those coefficients individually.

Moreover, even with the image data having other input form (such as GBR inputs) than the foregoing, the similar operating effect can also be achieved by weighing the coefficients to be multiplied by the quantization matrix elements in a like manner to the above case in match with the visual sensitivity of human eyes (e.g., such that in the case of GBR inputs, weighing is applied to the G input near a luminance signal, the B input and the R input in this order).

(Another Embodiment)

Fig. 2 shows a second embodiment of the present invention. Components having the same functions as those in the prior art are denoted by the same reference numerals and will not be described here. Blocks a, b and c circumscribed by broken lines all function in a like manner. However, an input to the block a is only the luminance signal Y, an input to the block b is only the chrominance signal P_B , and an input to the block c is only the chrominance signal P_C . Thus, the luminance signal and the chrominance signals are separately processed in parallel for coding. Accordingly, a control circuit 222 supplies a control signal suitable for parallel processing to a quantization matrix generation circuit 221 so that the quantization matrices for the luminance signal and the chrominance signals are generated almost at the same timing. Likewise, a scaling factor generation circuit 220 is controlled by the control circuit 222 to generate scaling factors S_Y , S_B , S_R for the luminance signal Y and the chrominance signals P_B , P_R almost at the same timing. S_Y , S_B , S_R are functions of S_0 as expressed below:

$$S_Y = S_0, S_B = f_B(S_0), S_R = f_R(S_0)$$

Alternatively, the scaling factor generation circuit 220 may generate coefficients to be directly multiplied by the quantization matrix elements for the chrominance signals. In this case, coefficients M_B , M_R used for the chrominance signals M_B , M_R are given by:

$$M_B = g_B(S_0), M_R = g_R(S_0)$$

By so arranging, it is possible to not only obtain an image with less deterioration in image quality even at the increased compression rate, but also adapt to high-speed coding through parallel processing, which permits real-time coding of moving images and the like.

As explained above, by setting the scaling factor values or the coefficients themselves to be multiplied by the quantization matrix elements for the luminance signal Y and the chrominance signals P_B , P_R separately, and controlling the scaling factor values or the coefficients themselves to be multiplied by the quantization matrix elements for the chrominance signals P_B , P_R depending on the scaling factor value S_0 of the luminance signal Y, there can be obtained an image with less deterioration in image quality corresponding to the compression rate (namely, an image with less deterioration in quality of color images can be obtained even at the increased compression rate through such a control, for example, that in need of increasing the compression rate, a smaller scaling factor value than that of the luminance signal Y is set for the chrominance P_R which has higher visual sensitivity and a larger scaling factor value is set for the chrominance signal P_B). Further, by controlling the coefficients to be multiplied by the quantization matrix elements for the chrominance signals using functions, the coding can be performed more efficiently than the case of setting those coefficients individually.

Thus, according to the present invention, it is possible to provide an image encoding apparatus and method with which a reproduced image of high quality can be obtained.

An example of the present invention applied to a moving image encoding apparatus will be described below in detail. Fig. 6 is a block diagram of the apparatus.

In the drawing, denoted by 20 is an input terminal for an analog TV signal. The TV signal sensed by using a CCD sensor and inputted through the terminal 20 is converted by an A/D converter 22 into a digital signal of 8 bits. The digital signal is divided into blocks each comprising (8×8) pixels by an (8×8) block formation circuit 26 which operates in a like manner to the $(N \times N)$ DCT circuit 102 in Fig. 1, the blocks being supplied to a DCT circuit 26 one by one.

Pixel data D_{11} to D_{88} of each block are converted by the DCT circuit 28 into a data matrix X_{11} to X_{88} for two-dimensional frequency regions as with the case of Fig. 1, followed by being supplied to quantization circuits 32a to 32d and a 1F (one-frame) delay circuit 34.

A quantization matrix generation circuit 36 generates similar matrices to those generated from the aforesaid quantization matrix generation circuit 111.

Supplied to multipliers 38a to 38d are initial coefficients C_1 to C_4 as control coefficients (scaling factors) C from a coefficient calculator 48. As with the case of Fig. 1, the multipliers 38a to 38d multiply outputs of the quantization matrix generation circuit 36 and the control coefficients C_x for respective components, i.e., $(W_{ij} \times C_x / C_0)$, the multiplied results being outputted to the quantization circuits 32a to 32d. The quantization circuits 32a to 32d respectively quantize conversion coefficients with the quantizing steps controlled by the control coefficients C_1 to C_4 and output the quantized values to VLCs (Variable Length Coders) 40a to 40d.

In this embodiment, the VLCs 40a to 40d do not output the actual coded data, but output only information nb1 to nb4 of total bit number for each image as resulted from the similar processing to an ordinary VLC.

Using the information nb1 to nb4 outputted from the VLCs 40a to 40d and the control coefficients C_1 to C_4 , the coefficient calculator 48 calculates a control coefficient C_5 desired for the total bit number and outputs it to a multiplier 38e.

The coefficient calculator 48 also outputs control coefficients C_6 , C_7 as an approximate value of C_5 to multipliers 38f, 38g and, on the other hand, outputs the control coefficients C_5 to C_7 to terminals 44a to 44c, respectively.

It is here assumed that when $C_n \leq C_5 \leq C_{n+1}$ holds for C_5 , C_6 and C_7 meet the relationships $C_n \leq C_6 < C_5$ and $C_5 < C_7 \leq C_{n+1}$, respectively, and n meets the relationship $1 \leq n \leq 3$.

The multipliers 38e to 38g respectively multiply outputs of the quantization matrix generation circuit 36 and the control coefficients C_5 to C_7 as with the multipliers 38a to 38d, the multiplied results being outputted to quantization circuits 32e to 32g within a vertical blanking period.

Meanwhile, those DCT conversion coefficients resulted from delaying DCT conversion coefficients through one frame by the 1F delay circuit 34 are inputted to the quantization circuits 32e to 32g.

The conversion coefficients are quantized in the quantization circuits 32e to 32g with the quantizing steps controlled by the control coefficients C_5 to C_7 , and the quantized values are outputted to VLCs 40e to 40g. In this embodiment, the VLCs 40e to 40g output the actual coded data to entry buffers 42a to 42c and also output the total bit numbers nb5 to nb7 to a judgment circuit 50. The judgment circuit 50 delivers such an output to switches 44 and 46 as to select the quantization result which is less than the desired total bit number and nearest thereto. The entry buffers 42a to 42c store the coded data until the judgment circuit 50 issues the judgment result. The switch 44 selects one of the control coefficients in accordance with the judgment result and outputs it to a multiplexer 52. Also, the switch 46 selects one of the coded data and outputs it to the multiplexer 52. The multiplexer 52 multiplexes the control coefficient and the coded data, followed by outputting to an output terminal 54.

The scaling factor for quantizing the chrominance data may be controlled independently rather than being dependent on the scaling factor for quantizing the luminance data as stated before. In other words, the luminance data and the chrominance data may be coded in a completely parallel manner.

The scaling factor may be fixed in one frame of an image as mentioned before, or may be varied per block of $N \times N$ pixels.

Further, the scaling factor may be controlled depending on the amount of coded data resulted from the coding, or may be controlled depending on whether the original image is a line image including characters and the like or a natural image.

Additionally, while the component Y is extracted as luminance data and the components P_B , P_R are extracted as chrominance data in the above embodiments, those components may be (Y, C_R, C_B) , (L^*, a^*, b^*) , (L^*, u^*, v^*) , (Y, u, v) or the like.

Moreover, the functions of the control circuit 112, the scaling factor generation circuit 113 and the quantization matrix generation circuit 111 can be executed by a CPU and a RAM, a ROM, etc. connected to the CPU.

It should be understood that the present invention is not limited to the embodiments as set forth above and may be variously changed and modified within the scope of the invention defined in the attached claims.

Claims

1. A color image processing apparatus comprising: input means for inputting image data representing a color image;
first encoding means for encoding the image data by using a first encoding parameter; and
second encoding means for encoding the same image data by using a second encoding parameter different from the first encoding parameter, and
wherein said first and second encoding means encode the image data in parallel.
2. Apparatus according to claim 1 comprising:
dividing means for dividing the image data into a plurality of blocks having a predetermined size;
first quantizing means for quantizing the image data of each block by using a first set of quantization parameters;
second quantizing means for quantizing the same image data of each block by using a second set

of quantization parameters different from the first set of quantization parameters, and wherein the first encoding means encode the image data quantized by said first quantizing means, and the second encoding means encode the image data quantized by said second quantizing means.

- 5 3. Apparatus according to claim 1, wherein the image data is composed of luminance data and chrominance data.
4. Apparatus according to any preceding claim, wherein said input means comprises a CCD sensor.
- 10 5. Apparatus according to any preceding claim, wherein said dividing means divides the image data into blocks each comprising $N \times N$ pixels.
6. Apparatus according to any preceding claim, wherein said first set of quantization parameters is smaller than said second set of quantization parameters.
- 15 7. Apparatus according to any preceding claim, wherein a second coefficient depends on a first coefficient.
8. Apparatus according to any preceding claim, wherein said apparatus is a moving image coding apparatus.
- 20 9. Apparatus according to any preceding claim, wherein said first and second encoding means are capable of variable length coding.
- 25 10. A color image coding apparatus according to any preceding claim, further comprising control means for controlling a quantization parameter for quantizing the image data by using encoding result of said first and second encoding means.
11. A color image processing method comprising:
 - 30 an input step of inputting image data representing a color image;
 - a first encoding step of encoding the image data by using a first encoding parameter; and
 - a second encoding step of encoding the same image data by using a second encoding parameter different from the first encoding parameter, wherein said first and second encoding steps are performed in parallel.
- 35 12. A method according to claim 11 and comprising:
 - a dividing step of dividing the input image data into a plurality of blocks having a predetermined size;
 - 40 a first quantizing step of quantizing the image data of each block by using a first set of quantization parameters;
 - a second quantizing step of quantizing the same image data of each block by using a second set of quantization parameters different from the first set of quantization parameters, and wherein the first encoding step encodes the image data quantized in said first quantizing step and the second encoding step encodes the image data quantized in said second quantizing step.

45

50

55

FIG. 1

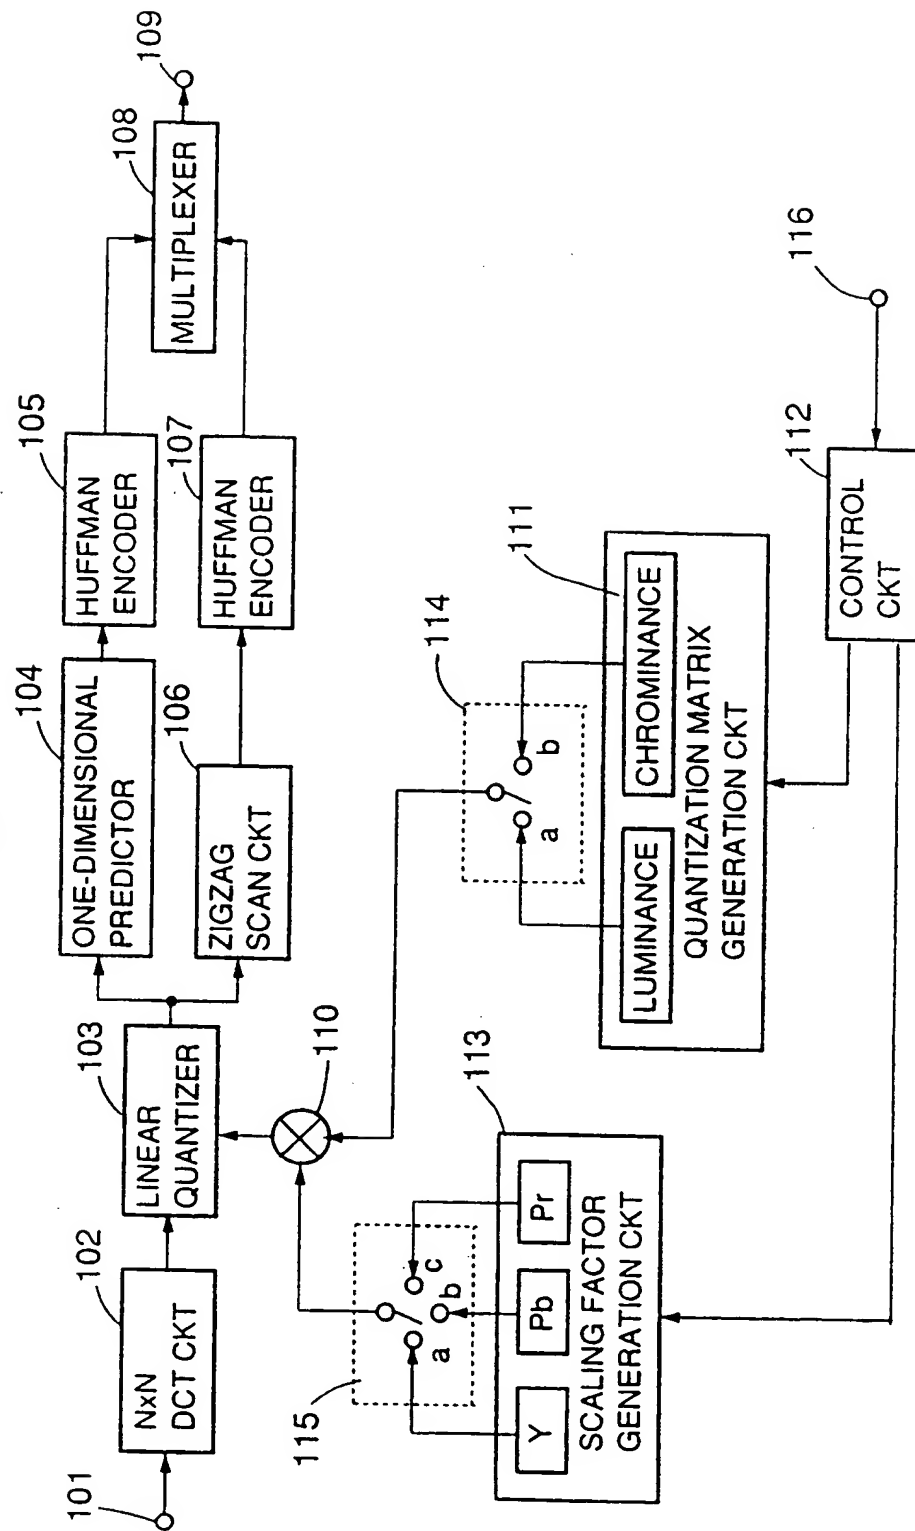


FIG.2A
FIG.2B

FIG.2A

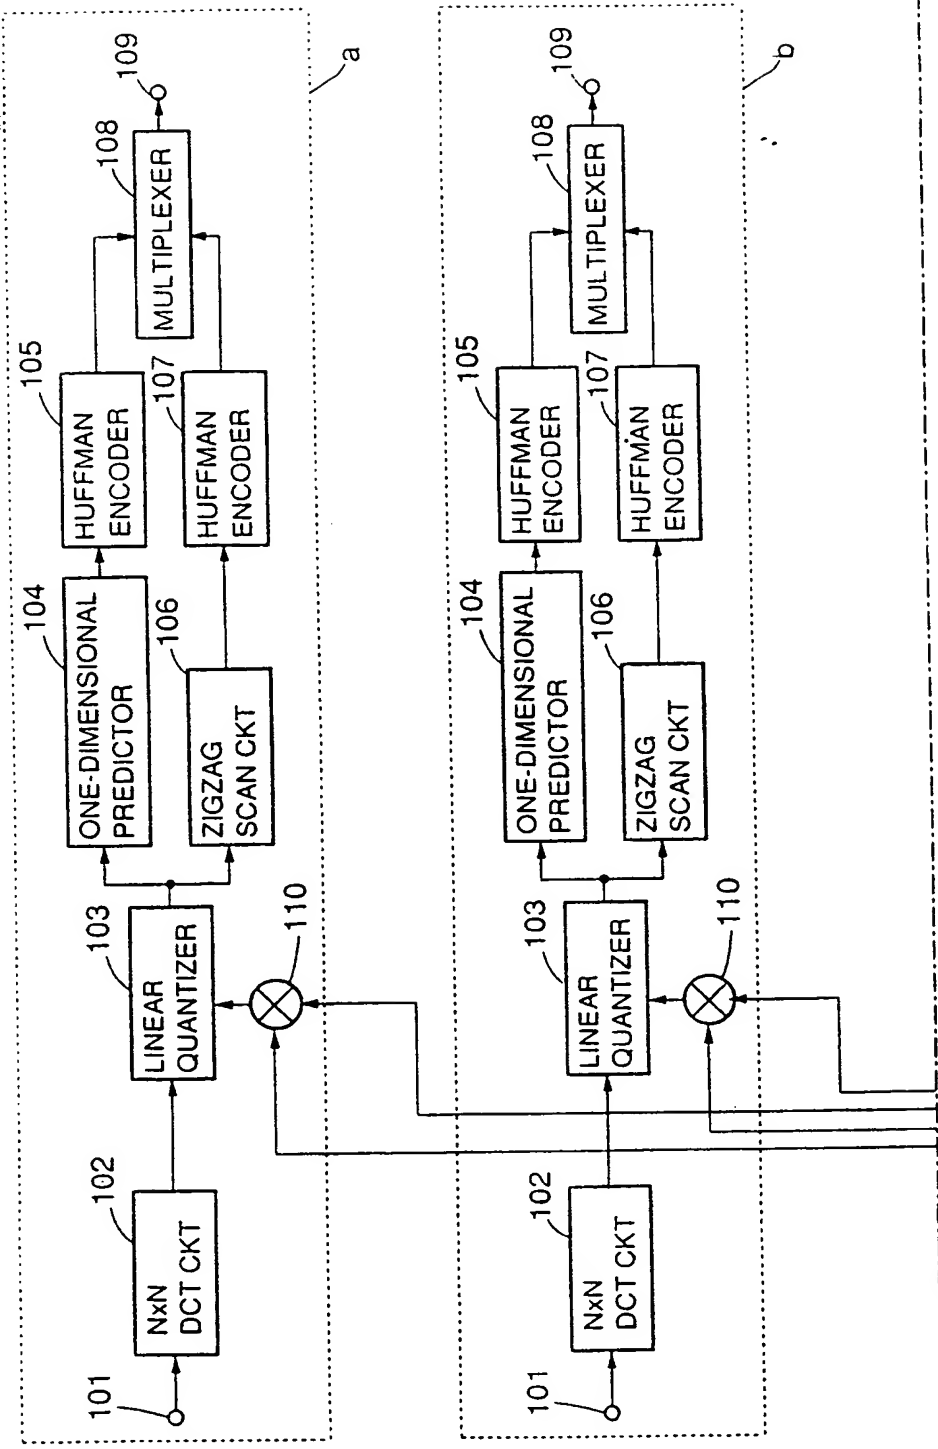


FIG.2B

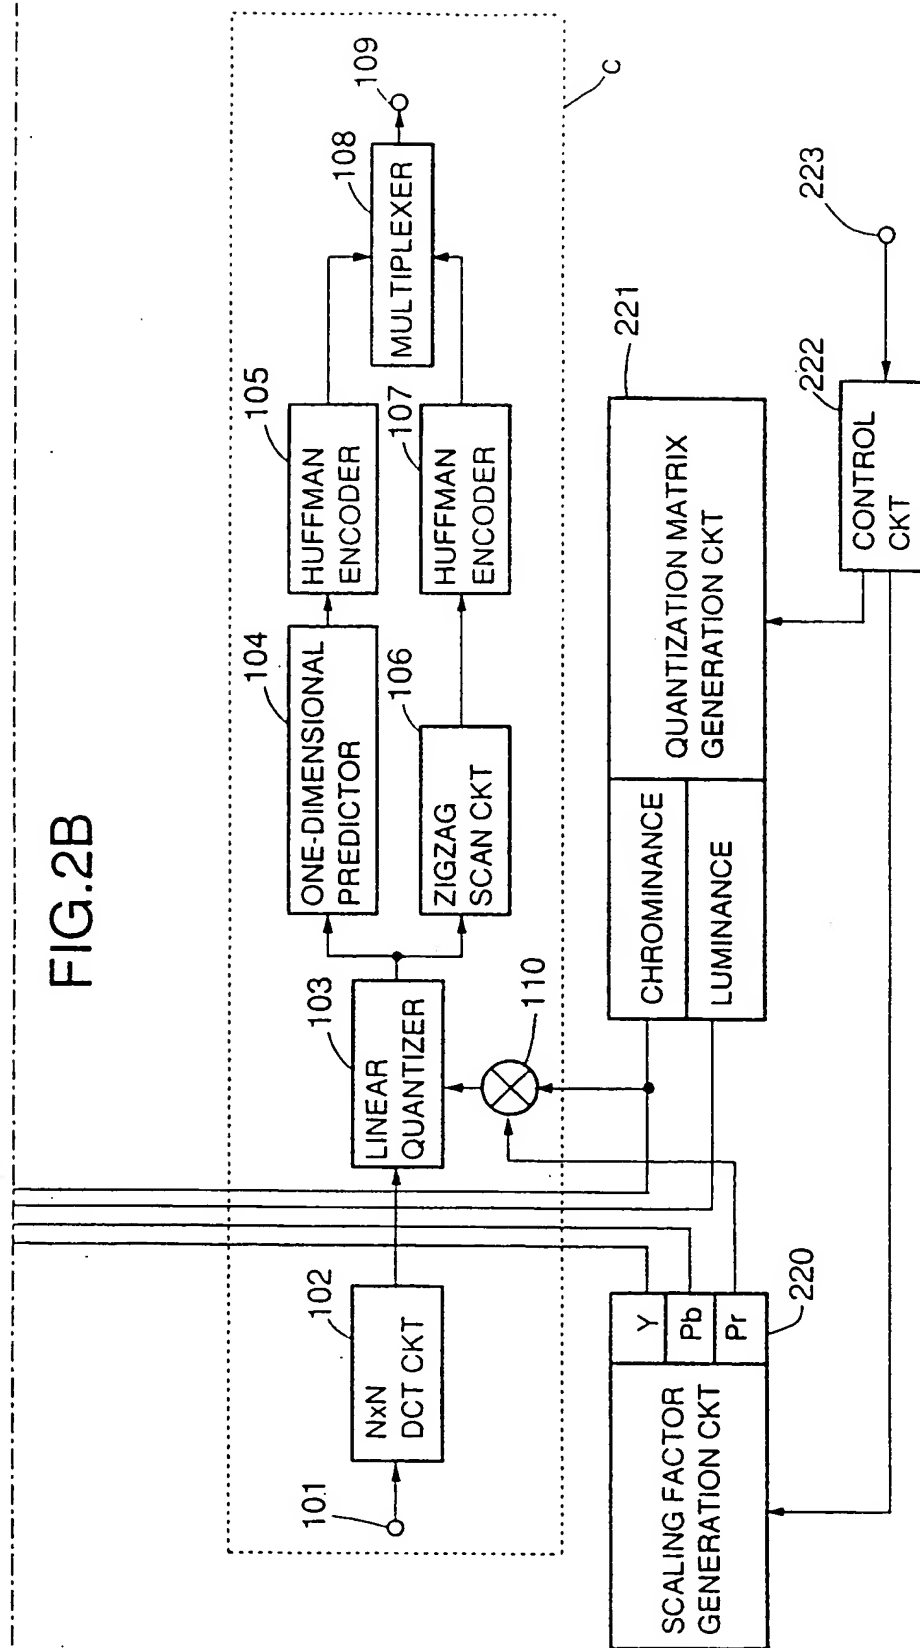


FIG.3

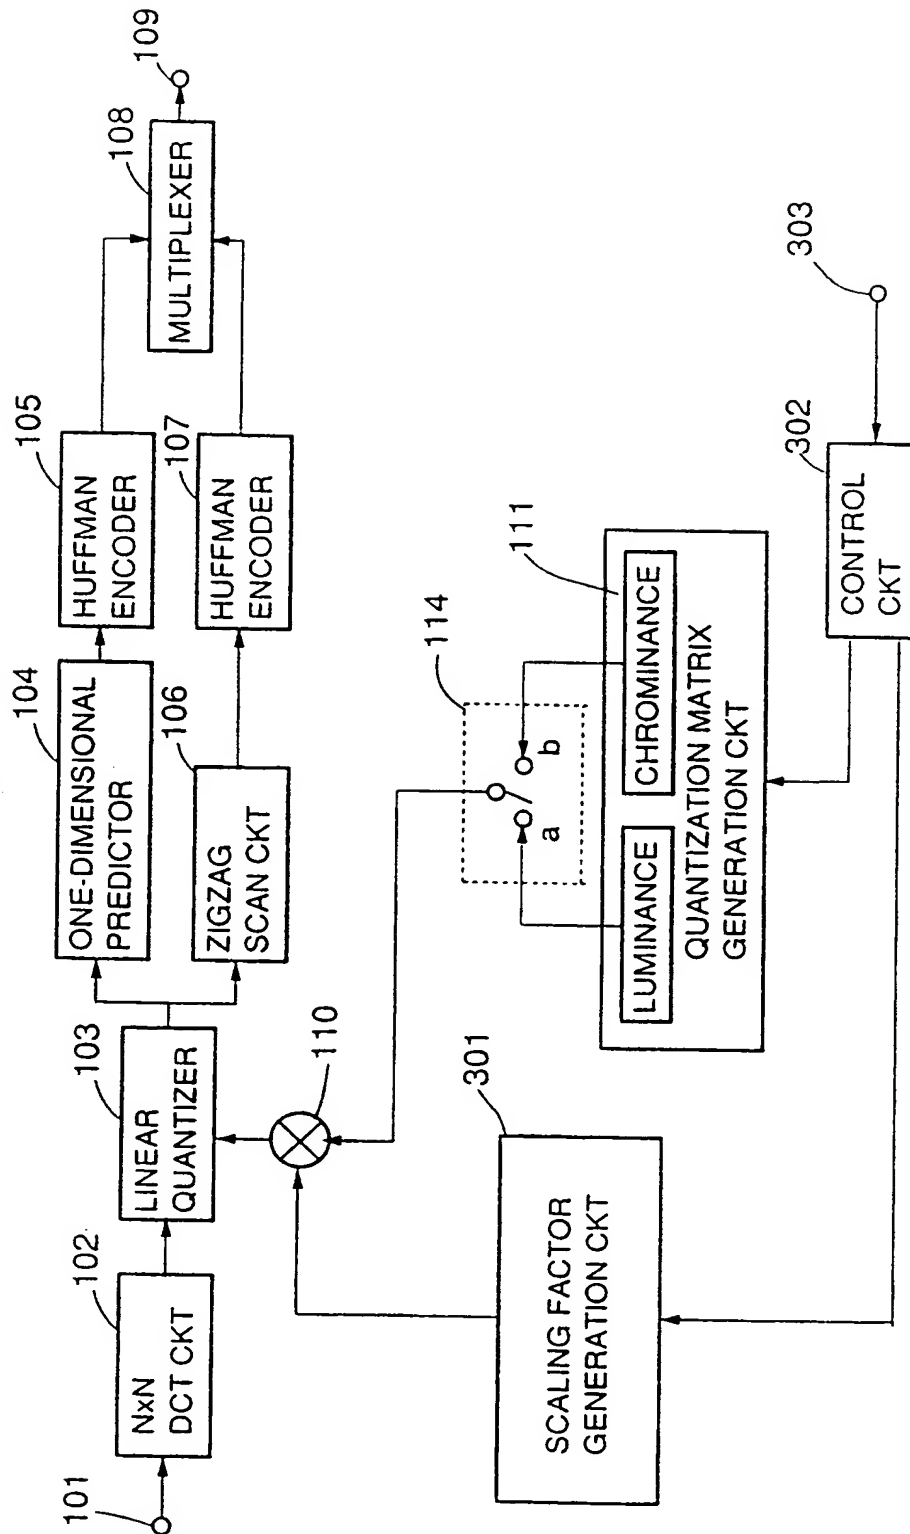


FIG.4

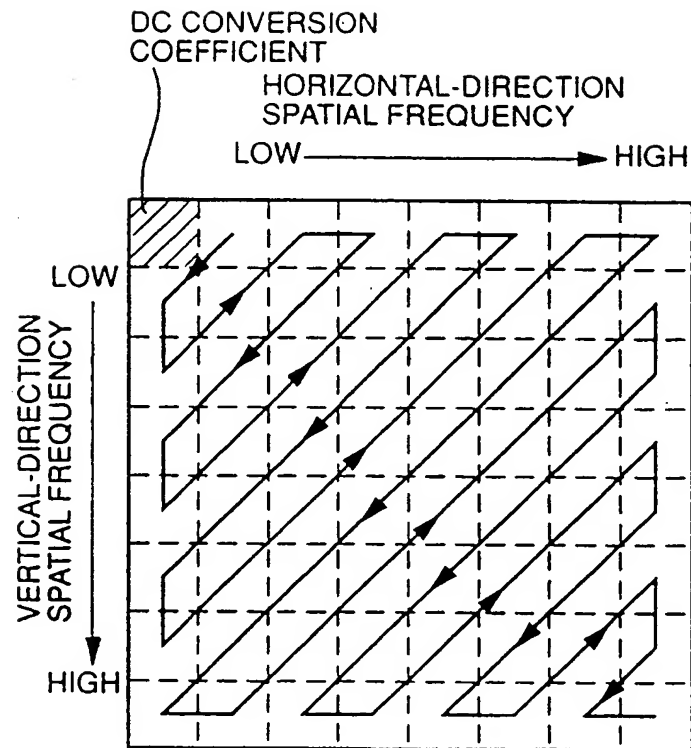


FIG.5

| | | | | | | | |
|----|----|----|----|-----|-----|-----|-----|
| 16 | 11 | 10 | 16 | 24 | 40 | 51 | 61 |
| 12 | 12 | 14 | 19 | 26 | 58 | 60 | 55 |
| 14 | 13 | 16 | 24 | 40 | 57 | 69 | 56 |
| 14 | 17 | 22 | 29 | 51 | 87 | 80 | 62 |
| 18 | 22 | 37 | 56 | 68 | 109 | 103 | 77 |
| 24 | 35 | 55 | 64 | 81 | 104 | 113 | 92 |
| 49 | 64 | 78 | 87 | 103 | 121 | 120 | 101 |
| 72 | 92 | 95 | 98 | 112 | 100 | 103 | 99 |


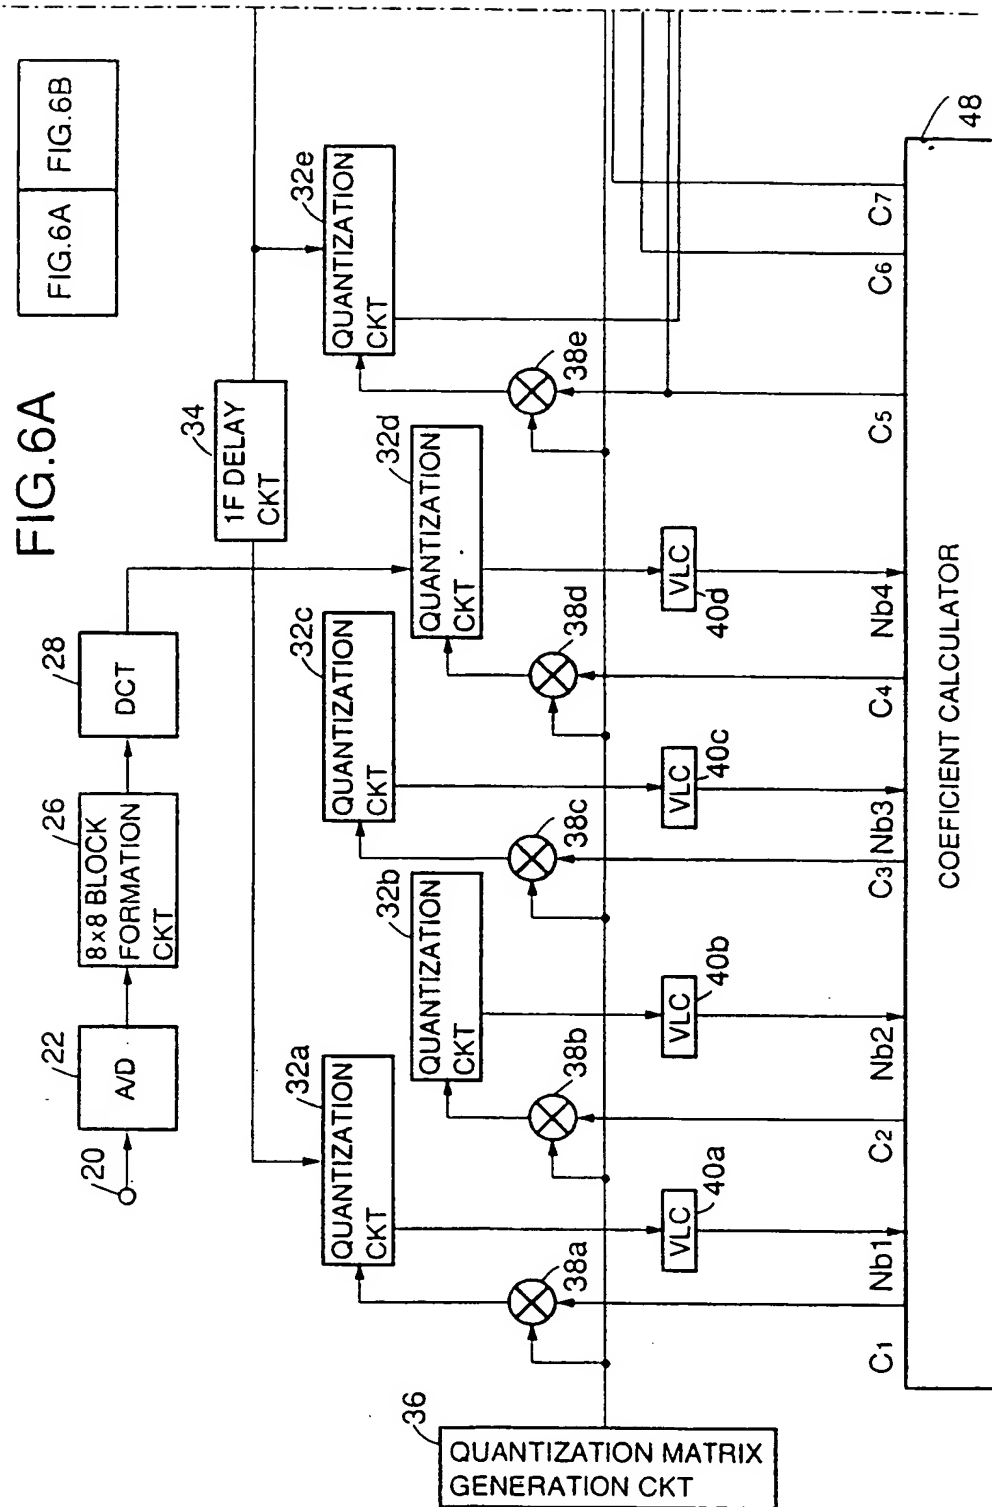


FIG. 6B





Europäisches Patentamt
European Patent Office
Office européen des brevets

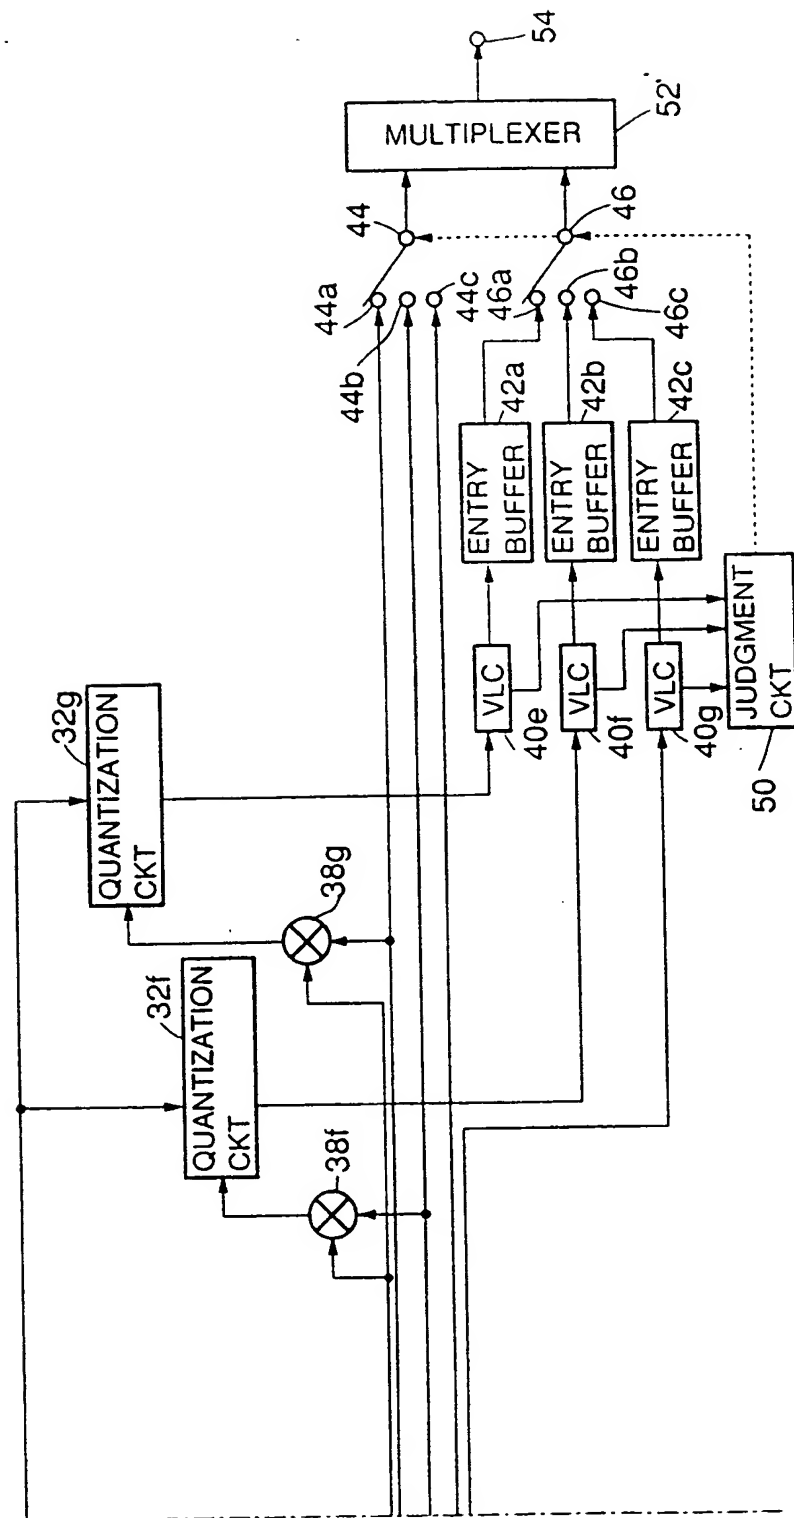

Publication number: **0 566 219 A3**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **93201962.3**

(51) Int. Cl.⁵: **H04N 11/04, H04N 7/13**

(22) Date of filing: **22.04.92**

(30) Priority: **23.04.91 JP 92288/91**

(43) Date of publication of application:
20.10.93 Bulletin 93/42

(50) Publication number of the earlier application in
accordance with Art.76 EPC: **0 510 921**

(84) Designated Contracting States:
DE ES FR GB IT NL

(98) Date of deferred publication of the search report:
16.02.94 Bulletin 94/07

(71) Applicant: **CANON KABUSHIKI KAISHA**
30-2, 3-chome, Shimomaruko,
Ohta-ku
Tokyo(JP)

(72) Inventor: **Fujii, Akio, c/o Canon Kabushiki**
Kaisha
30-2, 3-chome,
Shimomaruko
Ohta-ku, Tokyo(JP)


(74) Representative: **Beresford, Keith Denis Lewis**
et al
BERESFORD & Co.
2-5 Warwick Court
High Holborn
London WC1R 5DJ (GB)

(54) **Image processing apparatus.**

(57) The invention is intended to improve image quality in a process of image coding. In an apparatus for quantizing conversion data resulted from converting image information into frequency regions and then coding the quantized data, a coefficient to be multi-

plied by a chrominance quantizing matrix is set depending on a coefficient to be multiplied by a luminance quantizing matrix for an improvement in color reproducibility.

FIG.1

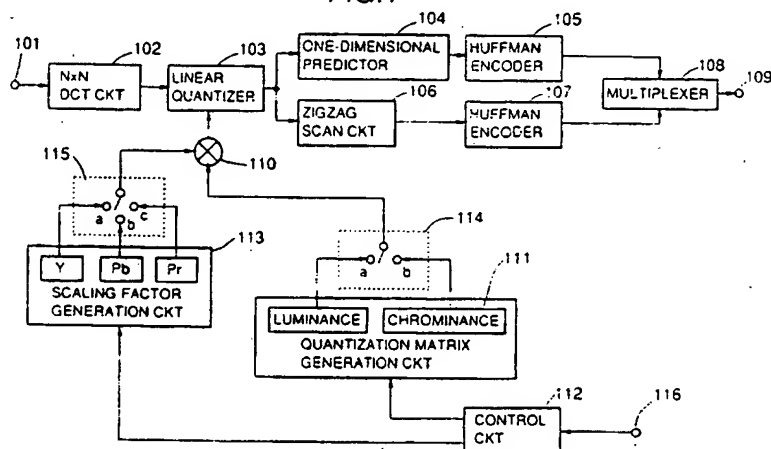

EP 0 566 219 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 93 20 1962

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|---|---|--|---|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int. Cl.5) |
| Y | EP-A-0 239 076 (KOKUSAI DENSHIN DENWA ET AL.) * column 4, line 50 - column 5, line 36 * * column 7, line 6 - line 25 * * column 13, line 5 - line 43; figures 1,10 * | 1-9,11,12 | H04N11/04 H04N7/13 |
| A | --- | 10 | |
| Y | EP-A-0 323 363 (THOMSON GRAND PUBLIC) * page 2, line 63 - page 3, line 23 * * page 5, line 8 - page 11, line 5; figures 2,3 * | 1-3,5-9,11,12 | |
| A | --- | 10 | |
| Y | US-A-4 984 076 (WATANABE ET AL.) * column 13, line 5 - column 17, line 21; figures 24,29 * | 1-3,5,6,8,9,11,12 | |
| Y | EP-A-0 400 756 (N. V. PHILIPS' GLOEILAMPENFABRIEKEN) * column 4, line 31 - column 7, line 14; figure 4A * | 1,3,5,6,8,9,11 | TECHNICAL FIELDS SEARCHED (Int. Cl.5) H04N |
| A | --- | 2,12 | |
| Y | WO-A-91 01613 (EASTMAN KODAK COMPANY) * page 6, line 3 - line 19 * * page 11, line 33 - page 12, line 29 * * page 13, line 26 - page 15, line 4; figures 1,6,8 * | 1,3-5,8,9,11 | |
| A | --- | 2,10,12 | |
| | --- | -/-- | |
| The present search report has been drawn up for all claims | | | |
| Place of search THE HAGUE | | Date of completion of the search 22 December 1993 | Examiner Verleye, J |
| CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document | | | |



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 93 20 1962

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|---|--|--|--|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.5) |
| Y | EP-A-0 401 854 (MATSUSHITA ELECTRIC INDUSTRIAL CO) * page 4, line 37 - line 55 * * page 13, line 16 - line 30; figures 3,13 * | 1,3,5,6, 8,9,11 | |
| A | --- | 2,10,12 | |
| P,X | EP-A-0 475 251 (MITSUBISHI DENKI KABUSHIKI KAISHA) * page 2, line 5 - line 30 * * page 4, line 53 - page 7, line 42; figures 4-8 * | 1-3,5,8, 9,11,12 | |
| P,Y | --- | 4,6,7 | |
| P,A | --- | 10 | |
| P,X | EP-A-0 469 648 (AMPEX CORPORATION) * page 4, line 34 - page 11, line 33; figures 1-3 * | 1-3,5, 8-12 | |
| P,Y | --- | 4,6,7 | |
| P,Y | DE-A-40 34 535 (OLYMPUS OPTICAL) * column 8, line 50 - column 15, line 62; figures 1,3 * | 1-6,8,9, 11,12 | |
| P,A | --- | 10 | |
| E | EP-A-0 510 929 (CANON KABUSHIKI KAISHA) * the whole document * | 1,4,5, 8-11 | |
| E | EP-A-0 481 768 (MATSUSHITA ELECTRIC INDUSTRIAL CO) * page 5, line 13 - page 8, line 24; figures 4,5 * ----- | 1,3,5,6, 8,10,11 | |
| The present search report has been drawn up for all claims | | | |
| Place of search THE HAGUE | | Date of completion of the search 22 December 1993 | Examiner Verleye, J |
| CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document | | | |

EPF FORM 1501 Q182 (P04C01)

THIS PAGE BLANK (USPTO)